

IS-DG610P-2F-8

8+2 Port Industrial Managed PoE+ Gigabit Ethernet Switch



Key features

- ▶ 8x Gigabit Ethernet ports with IEEE 802.3at PoE+
- ▶ 2x 1000F(x) SFP Slot
- ▶ Built for harsh environments and wide temperature range application
- ▶ RSTP, MSTP, ERPS, LACP for Network Redundancy
- ▶ QoS CoS/DSCP to increase determinism
- ▶ Supports IGMP Snooping v1/v2/v3, up to 1023 groups
- ▶ DHCP Relay Option 82 for policies IP address assignment
- ▶ SNMP v1/v2c/v3 for network management
- ▶ Supports Storm Protection
- ▶ USB storage for configuration-free replacement
- ▶ Support industrial automation protocols Ethernet/IP and Modbus TCP
- ▶ Supports PoE PD Alive Check Function for PoE Device Power Recycle

Specification

Technology

Standards	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.3ab 1000BaseT IEEE 802.3z 1000BaseX IEEE 802.3x Flow Control IEEE 802.3af Power over Ethernet IEEE 802.3at PoE+ IEEE 802.3ad/802.1AX LACP IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid STP IEEE 802.1s Multiple STP ITU-T G.8032 / Y.1344 ERPS IEEE 802.1Q VLAN Tagging IEEE 802.1ad Stacked VLANs IEEE 802.1p Class of Service IEEE 802.1X Network Authentication IEEE 802.1AB LLDP
Processing Type	Store and Forward

Switch Properties

Priority Queues	8 Queues
Jumbo Frame	9216bytes
MAC Table Size	16K
VLAN Table Size	4094
IGMP Group	1023
Packet Buffer	12Mbits

Software Feature

Network Redundancy	RSTP, MSTP, G.8032 ERPSv2, Port Trunking with LACP
Security	802.1X, RADIUS, TACACS+, SSL, SSH
Management	IPv4, IPv6, Web, Telnet, Serial Console, CLI, SNMP v1/v2c/v3, uPnP
Diagnostics	RMON, SNMP Inform/Trap, Syslog, SMTP, Port Mirroring, LLDP
Configuration	DHCP Server/Client, Relay Option 82, TFTP, USB

Filter	802.1Q VLAN, Q-in-Q, IGMP Snooping v1/v2/v3, IGMP Querier, Independent Vlan Learning
Time Sync.	NTP
QoS	CoS, DSCP, WRR/SPQ Queuing, Storm Protection
PoE	Powering Status, PoE Monitoring, Scheduling, PD Alive Check
Industrial Profiles	Ethernet/IP, Modbus TCP

Interface

RJ45 Port	8x 10/100/1000T(x) with PoE+, auto negotiation speed duplex mode, auto MDI/MDI-X
Fiber Port	2x 1000F(x) SFP Slot
PoE Pin Out	V+, V+, V-, V-, for pin 1, 2, 3, 6, Endspan, MDI Mode A
LED Indicators	Per unit: PWR1, PWR2, Fault, Ring Master, Ring State Ports: Link/Active with highest speed(Green), low speed(Amber) PoE: Output Power
Alarm Contact	1x relay output with current carrying capacity of 1A @ 24 VDC
Digital Inputs	1x isolated input from the electronics. +13 to +30V for state "1" -30 to +3V for state "0" Max. input current: 8mA
Button	Multiple functions reset button
Serial Console	1x RS232 in RJ45 connector with console cable, 115.2Kbps, 8N1
Storage	1x USB 2.0 storage for firmware update, configuration backup, restore, boot up and syslog

Power Requirements

Operation Voltage	48-57VDC, redundant dual inputs, >50VDC for PoE+ output recommended
Connection	1x removable 4-contact terminal block
Power Consumption	0.31A@48VDC without PDs' consumption
PoE Power Budget	Max. 240 W for total PD consumption, Max. 30 W per PoE port
Protection	Overload Current Protected, Reverse Polarity Protected

Mechanical Construction

Enclosure	Aluminum
Protection Class	IP30
Dimensions	72x145x118 mm (WxHxD)
Weight	0.9 kg
Mounting	DIN-Rail Mounting, Optional Wall Mounting Kits

Environmental Limits

Operating Temperature	Standard: -10°C ~ 60°C (14°F ~ 140°F) Extended: -40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (Non-Condensing)


Regulatory Approvals

EMI	CE EN 55032 Class A
EMS	IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS) IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	UL 60950-1/62368 (Pending) EN 50121-4
MTBF	>100,000 hours
Warranty	5 Years

Features with star(*) implies those are under development.

In a continuing effort of improvement and updated technology, product specifications are subject to change without notice.

Dimensions (unit = mm)

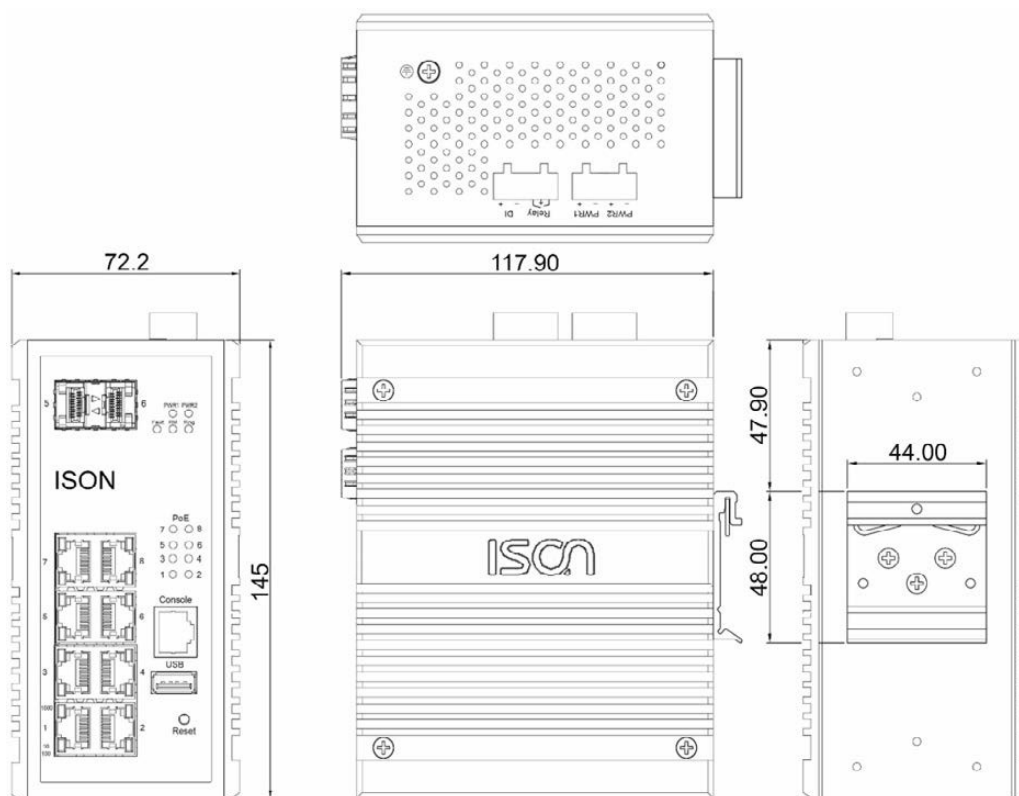

Ordering Information

Available Models	Description
IS-DG610P-2F-8	8+2 Port Industrial Managed PoE+ Gigabit Ethernet Switch - 8x 10/100/1000T(x) with 30W PSE + 2x 1000F(x) SFP Slot

Accessories

1. 100 Mb SFP Modules
2. Gigabit SFP Modules
3. IS-RK2U 19" rack mount kit
4. IS-RK4U 19" rack mount kit

Package Checklist

- IS-DG610P Switch
- RS232 Console Cable
- RJ45 Cap / SFP Cap / Din-Rail kit